

## CWDM DFB 2.5G Laser Diode Module With Pigtail Connection and SC/PC

Data Sheet

OLD3458-XXH1-SC

### Features

- Uncooled
- Type C laser
- Low threshold current
- Horizontal flange
- Single Isolator
- Output power: 2mW
- Operates in wavelengths of 1470/1490/1510/1530/1550/1570/1590/1610nm
- Single mode fiber pigtailed with SC/PC connector
- SONET OC-12/SDH STM-4, OC-48/SDH STM-16 compatible

### Applications

- Digital Signal Transmission
- Telecommunications (Local loop, interoffice and intraoffice)
- Data Communications
- Gigabit Ethernet
- LAN

### Description

The OLD3458-XXH1-SC is a hermetically sealed CWDM InGaAsP/ InP MQW- DFB laser diode module in a small coaxial type package, including a high speed InGaAs PIN monitor photodiode and single mode fiber pigtail connection. It comes with a single isolator and a horizontal flange.

The laser diode is designed for use in data communications systems and telecommunications systems over single mode fiber, and can operate in temperatures of 0°C to +70°C. The laser diode module transmits emission power to the monitor photodiode in the rear, which ensures highly stable emission at specific wavelengths from bandwidths of 1470 to 1610 nm.

**Safety**

Radiation emitted by laser diode devices can be dangerous to the eyes. Avoid direct or scattered radiation exposure to the eyes or skin. Device contains gallium arsenide (GaAs) which can be hazardous to your health. Please embrace all customary precautions and discretion while handling this device. Observe governmental laws and regulations when discarding this device.

**Performance Specifications**

**Absolute Maximum Ratings**

Stresses in excess of the absolute maximum ratings can cause damage to the optical device. Operations of the optical device are suggested to remain within the recommended operating conditions. Exposure to the absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Value	Unit
Storage Temperature	$T_{stg}$	-40 to +85	°C
Operating Case Temperature	$T_{op}$	0 to +70	°C
Peak Optical Output Power	$P_o$	8	mW
Forward Current (LD)	$I_{FLD}$	150	mA
Reverse Voltage (LD)	$V_{RLD}$	2	V
Reverse Current (PD)	$I_{RPD}$	2	mA
Reverse Voltage (PD)	$V_{RPD}$	15	V
Soldering Temperature	$S_{temp}$	260	°C
Soldering Time	$S_{time}$	10	sec

**Electrical and Optical Characteristics ( $T_C=25^\circ\text{C}$  unless otherwise noted)**


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Threshold Current	$I_{th}$	CW	-	10	15	mA
		CW, $T_C=0-70^\circ\text{C}$	-	-	50	
Operating Voltage	$V_{op}$	CW, Pop, $T_C=0-70^\circ\text{C}$	-	1.2	1.6	V
Operating Current	$I_{op}$	Pop=2.0mW	-	30	40	mA
Peak Wavelength	$\lambda_p$	CW, Pop	$\lambda_p - 2.0$	$\lambda_p$	$\lambda_p + 2.0$	nm
		CW, Pop, $T_C=0-70^\circ\text{C}$	$\lambda_p - 5.5$	$\lambda_p$	$\lambda_p + 7.5$	
Side-mode Suppression Ratio	SMSR	CW, Pop, $T_C=0-70^\circ\text{C}$	30	-	-	dB
Rise Time	$T_r$	$I_b=I_{th}$ , 20%-80%, $T_C=0-70^\circ\text{C}$	-	-	0.25	ns
Fall Time	$T_f$	$I_b=I_{th}$ , 20%-80%, $T_C=0-70^\circ\text{C}$	-	-	0.30	ns
Monitor Current	$I_m$	Pop, $V_{rp}=5V$	0.08	0.5	-	mA
Monitor Dark Current	$I_d$	$V_{rp}=5V$	-	-	10	nA
		$V_{rp}=5V$ , $T_C=0-70^\circ\text{C}$	-	-	100	
Monitor Capacitance	C	$V_{rp}=5V$ , $f=1\text{MHz}$	-	-	10	pF
Optical Isolation	OS	CW, Pop=2.0mW, $T_C=0-70^\circ\text{C}$	20	-	-	dB
Tracking Error	-	APC, 0 to +70° C	-	-	±1.5	dB

Note:

- $\lambda_p = \lambda_{47}, \lambda_{49}, \lambda_{51}, \lambda_{53}, \lambda_{55}, \lambda_{57}, \lambda_{59}, \lambda_{61}$

**Package Outline Diagram**

Dimensions for the device package are given in millimeters.

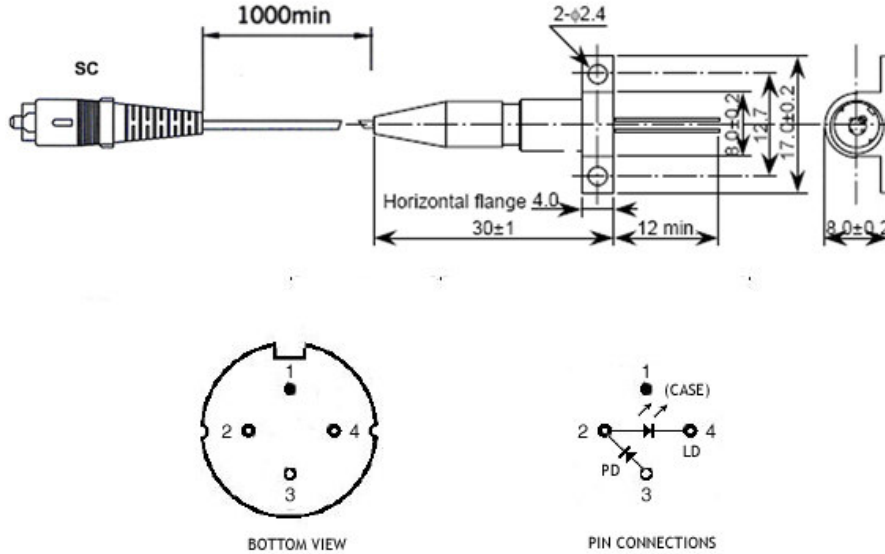

**Additional Information**

**Ordering Information**

Center Wavelength	Part Number
1470 nm	OLD3458-47H1
1490 nm	OLD3458-49H1
1510 nm	OLD3458-51H1
1530 nm	OLD3458-53H1
1550 nm	OLD3458-55H1
1570 nm	OLD3458-57H1
1590 nm	OLD3458-59H1
1610 nm	OLD3458-61H1

**Contact**

For additional information, product specifications, or information about Optocom:

Internet: <http://www.optocom.com>  
 Email: [sales@optocom.com](mailto:sales@optocom.com)  
 Tel: +1 978 988 8711  
 Fax: +1 978 988 8722

©2005 Optocom Corporation. All rights reserved. Information in this document is believed to be accurate and reliable and is subject to change without notice. Optocom Corporation will not be held liable for technical or editorial errors or omissions contained herein. Reproduction in whole or in part is prohibited without prior written consent of the copyright owner and no responsibility will be assumed by Optocom Corporation for any infringements of third parties. All other brand or product names mentioned are the trademarks or registered trademarks owned by their respective companies or organizations.