

Fiber Optic SFP 850 VCSEL 1.25G Lightwave Transceiver with DDMI

Data Sheet

OVD2300



The OVD2300 transceiver module operates at a wavelength of 850 nm for 1000BASE-SX applications.

Features

- Hot-pluggable
- Single +3.3 V supply
- RJ-45 style VF-45™ (SG) connector system
- 550 m link distance
- 850 nm Vertical Cavity Surface Emitting Laser (VCSEL)
- Internal Digital Diagnostics calibration
- IEEE 802.3z Gigabit Ethernet 1000BASE-SX compliant
- EEPROM with Serial ID Functionality
- Complies with Fiber Channel (100-M5-SN-I, 100-M6-SN-I) specifications
- ESD Class 2 per MIL-STD 883D Method 3015.7
- FCC (Class B) and EN 55022 compliant
- Multi-Source Agreement (MSA) for Small Form Factor Pluggable (SFP) Compliant

Applications

- Telecommunications and Data Communications system networks
- Fiber-to-the-desktop
- Gigabit Ethernet
- LAN, WAN, SAN
- Mainframes, workstations or storage devices
- Switches/bridges/routers/servers

Description

The OVD2300 transceiver provides signal conversion and processing for serial optical data communication applications. It operates over multimode fiber by converting lightwave information into an electrical signal and vice versa at a data rate of 1.25 Gb/s.

Housed in a compact metal package, the transceiver module consists of a transmitter and receiver optical subassembly coupled with a SG/VF-45™ receptacle. The module is designed especially for distances of up to 260 m with 62.5/125 μm multimode fibers.

This dual-fiber connector transceiver is designed at 1.25 Gb/s for use in Gigabit Ethernet 1000BASE-SX and 1x Fiber Channel applications.

*VF-45™ is a trademark of 3M.

Transceiver Monitoring Interface

OVD2300 provides an enhanced monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a normal factory-set range. The monitoring interface makes use of two wire address 1010001X (A2h) and is backward compatible with the Small Form Pluggable Multi-Source Agreement (SFP MSA).

Serial Identification (EEPROM)

An SFP having module definition 4 provides access to sophisticated identification information that describes the SFP transceiver’s capabilities, standard interface, manufacturer and other information. An EEPROM containing the detailed product information and digital diagnostic function for the host equipment is accessed by the 2-wire serial CMOS EEPROM protocol. See SFP MSA for detailed description.

Performance Specifications

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause damage to the optical device. Operations of the optical device are suggested to remain within the recommended operating conditions. Exposure to the absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Minimum	Maximum	Unit
Storage Temperature	T _S	-40	+85	°C
Operating Temperature	T _A	0	70	°C
Lead Soldering Temperature (≈10 sec)	T _{SOLD}		260	°C
Power Supply Voltage	V _{CC}	0	5.5	V
Differential Data Input Voltage			V _{CC} +0.5	V

Transmitter Electro-Optical Interface

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Launched Power (Average) ¹	P _o	-9.5		-4	dBm

Safety

Laser Compliance Statement

The OVD2300 is classified as a Class I Laser Product. It complies with IEC 60825-1 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated under recommended operating conditions. Because the transceiver is designed to be inherently eye safe, it does not require open fiber control thus eliminating complex electronics or mechanics.

Caution - use of device other than those specified herein may result in hazardous laser radiation exposure or other damage. Please embrace all customary precautions and discretion while handling this device.

OVD2300 SFP TRANSCEIVER DATA SHEET

Center Wavelength	λ_c	830	850	860	nm
Spectral Width (RMS)	$\Delta\lambda$			0.85	nm
Relative Intensity Noise	RIN			-117	dB/Hz
Extinction Ratio (Dynamic)	E_r	9			dB
Rise Time, 20% - 80%	t_R			260	ps
Total Contributed Jitter	TJ			225	ps
Input Differential Voltage Swing	V_{IN}	0.5		2.4	V
Supply Current	I_{TX}		60		mA

Note:

1. Into multimode fiber, 50/125 μm or 62.5/125 μm core diameter.

Receiver Electro-Optical Specifications

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Sensitivity (Average Power) ¹	P_{IN}		-19	-17	dBm
Saturation (Average Power)	P_{SAT}	0			dBm
Signal Loss Deassert Level ²	P_{SLD}			-20	dBm
Signal Loss Assert Level ³	P_{SLA}	-30			dBm
Signal Loss Hysteresis	$P_{SLD}-P_{SLA}$		3		dB
Differential Data Output Voltage Swing	V_{OUT}	0.4		2	V
Output Data Rise/Fall Time, 10% - 90%	t_r, t_f			375	ps
Return Loss of Receiver	RL	12			dB
Supply Current ⁴	I_{RX}		80		mA

Notes:

1. Average optical power at which the BER is 1×10^{-12} . Measured with a 2^7-1 NRZ PRBS and ER = 9 dB.
2. Optical power above which the SIGNAL LOSS toggles from High to Low state.
3. Optical power below which the SIGNAL LOSS toggles from Low to High state.
4. Supply current including Rx outputs into a 50 Ω load.

Timing Parameters¹

Parameters	Symbol	Min	Max	Units	Condition
Tx Disable Assert Time	t_{off}		10	μs	Time from rising edge of Tx Disable to when the optical output falls below 10% of nominal
Tx Disable Negate Time	t_{on}		1	ms	Time from falling edge of Tx Disable to when the modulated optical output rises above 90% of nominal
Time to initialize, Including reset of Tx Fault	t_{init}		300	ms	From power on or negation of Tx Fault using Tx Disable
Tx Fault Assert Time	t_{fault}		100	μs	Time from fault to Tx fault on
Tx Disable to reset	t_{reset}	10		μs	Time Tx Disable must be held high to reset Tx Fault
LOS Assert Time	t_{loss_on}		100	μs	Time from LOS state to Rx LOS assert
LOS Deassert Time	t_{loss_off}		100	μs	Time from non-LOS state to Rx LOS deassert
Serial ID Clock Rate	f_{serial_clock}		100	kHz	


Note:

1. See SFP MultiSource Agreement (MSA) for detail descriptions of control and status timing requirements.

Regulatory Compliance

Feature	Standard	Notes
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD 883D Method 3015.7	Class 1 (> 1000V)
<i>Immunity:</i> Electrostatic Discharge (ESD) to the Duplex VF-45™ Receptacle	EN 61000-4-2 IEC 1000-4-2	Discharges of ±15kV with an air discharge probe on the receptacle cause no damage.
<i>Immunity:</i> Radio Frequency Electromagnetic Field	EN 61000-4-3 IEC 1000-4-3	With a field strength of 3V/m rms, noise frequency ranges from 10 MHz to 1 GHz. No effect on transceiver performance between the specification limits.
<i>Emission:</i> Electromagnetic Interference (EMI)	FCC Class B EN 55022 Class B CISPR 22	Noise frequency range: 30 MHz to 5 GHz

Pin Assignment

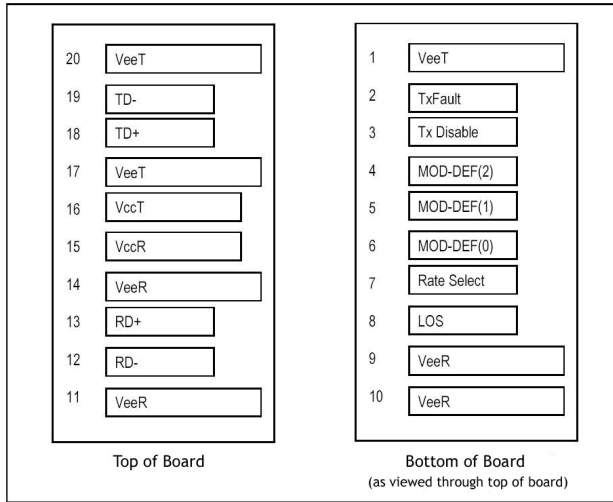

Pin Description and Plug-in Sequence¹ (1-Grd, 2-Power, 3-Signal)

Pin No.	Name	Description	Plug-in Sequence	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	High indicates a laser fault of some kind. Low indicates normal operation.
3	TX Disable	Transmitter Disable	3	Transmitter disables on high or open.
4	MOD-DEF 2	Module Definition 2	3	2 wire serial ID interface
5	MOD-DEF 1	Module Definition 1	3	2 wire serial ID interface
6	MOD-DEF 0	Module Definition 0	3	Grounded in module
7	Rate Select	Bandwidth Selection	3	No implementation
8	LOS	Loss of Signal	3	High indicates the received optical power is below the worst-case receiver sensitivity. Low indicates normal

OVD2300 SFP TRANSCEIVER DATA SHEET

				operation. In low state, the output will be pulled to < 0.8V.
9	VeeR	Receiver Ground	1	
10	VeeR	Receiver Ground	1	
11	VeeR	Receiver Ground	1	
12	RD-	Inv. Received Data Out	3	AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES.
13	RD+	Received Data Out	3	
14	VeeR	Receiver Ground	1	
15	VccR	Receiver Power	2	3.3 V ± 5%
16	VccT	Transmitter Power	2	3.3 V ± 5%
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	AC-coupled, differential lines with 100Ω differential termination inside the module.
19	TD-	Inv. Transmit Data In	3	
20	VeeT	Transmitter Ground	1	


Note:

1. Pin engagement sequence during hot plugging.


Physical Characteristics

Outline Diagram

Dimensions for the device package are given in millimeters.

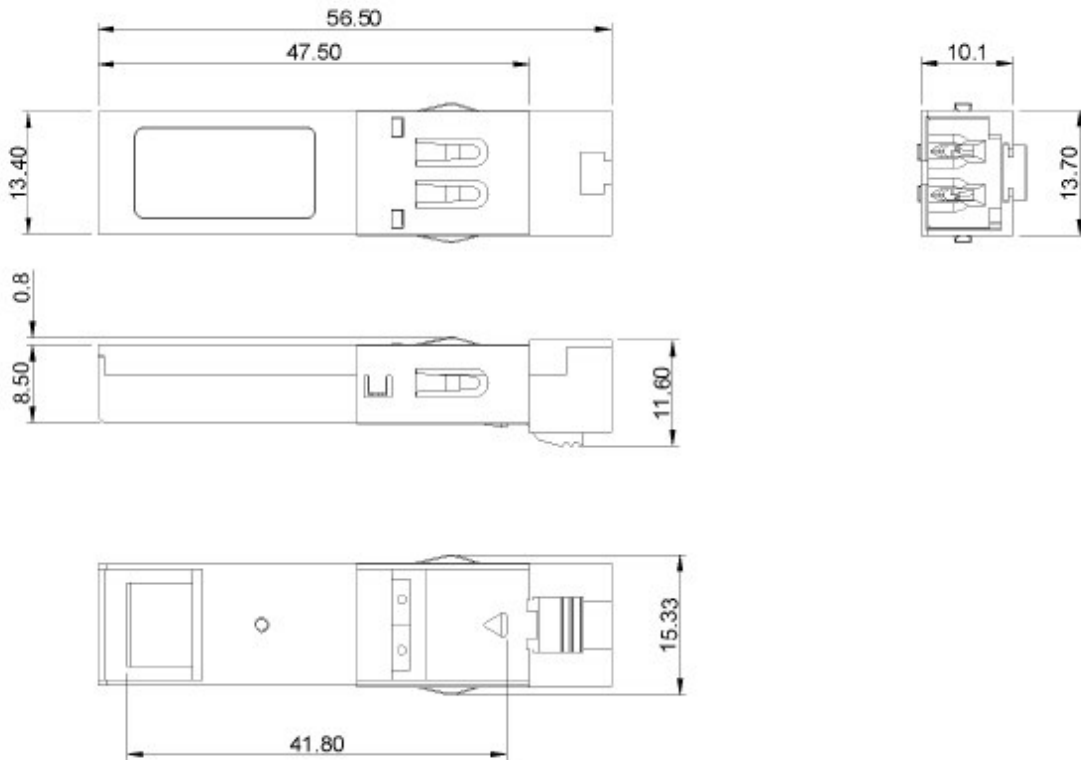

Recommended Interface Diagram

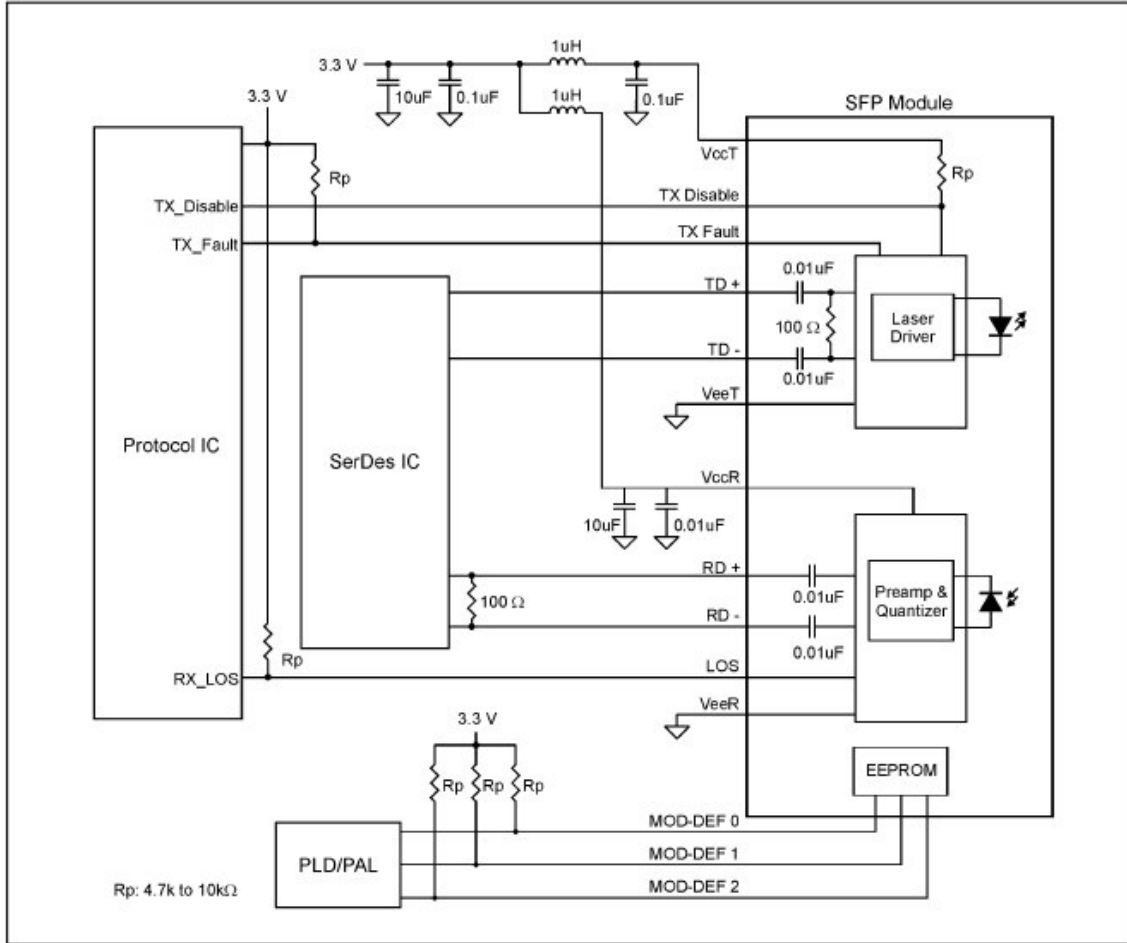

Additional Information

Contact

For additional information, product specifications, or information about Optocom:

Internet: <http://www.optocom.com>
 Email: sales@optocom.com
 Tel: +1 978 988 8711
 Fax: +1 978 988 8722

©2005 Optocom Corporation. All rights reserved. Information in this document is believed to be accurate and reliable and is subject to change without notice. Optocom Corporation will not be held liable for technical or editorial errors or omissions contained herein. Reproduction in whole or in part is prohibited without prior written consent of the copyright owner and no responsibility will be assumed by Optocom Corporation for any infringements of third parties. All other brand or product names mentioned are the trademarks or registered trademarks owned by their respective companies or organizations.